



- Dual 6" LF in Band Pass Vented Enclosure
- Powering Mode: LF Passive
- For Permanent Installation

Product Information

PULCEW is a stereo subwoofer with high output low distortion that provides response in the range 40 - 180 Hz. PULCEW uses dual 160 mm (6") low frequency cone with 38 mm (1.5") voice coil for better performance in permanently installed applications. PULCEW offers passive powering mode, band-pass mechanical filter and the internal crossover network for satellite out. PULCEW performs well with PULCE loudspeakers to form full-range reproduction systems, it is also compatible with other LSS small mid-range loudspeaker. On request can be ordered passive crossover network with system of EQ for satellites.

Data Sheet

Frequency Response	±5 dB 40 Hz ~ 180 Hz -10 dB 30 Hz
--------------------	--------------------------------------

Sensitivity (1 Watt @ 1 m)	92 dB
----------------------------	-------

Max SPL Calculated (Power AES) [PEAK]	114 dB [118 dB]
---------------------------------------	--------------------

Nominal Input Impedance (Ω)	8+8 Ω
-----------------------------	-------

Power Handling (Watts Cont. AES) [PEAK]	80+80 W [200 + 200 W]
---	--------------------------


Nominal Dispersion (@ -6 dB)	360°
------------------------------	------

Dimensions mm (±1 mm) (H x W x D)	270 x 400 x 400
-----------------------------------	-----------------

Weight	10,4 Kg
--------	---------

Enclosure Material

- Enclosure Material: MDF of 12 mm
- Finish: Texture Polyurethane Black Paint
- Connectors: Black and Red Clamps or 2 Neutrik NL4 Speakon

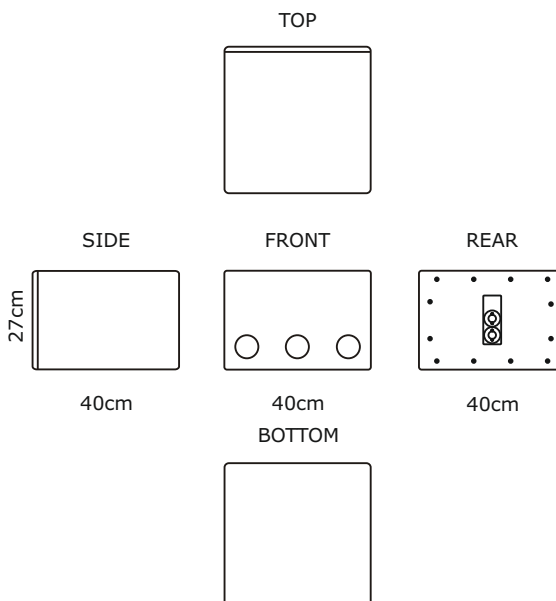

INSTALL | EVENTS | PORTABLE